


High Resolution High Range VF Array Bullet Camera with OSD



Main Features

- ⇒ 1 / 3" SONY SUPER HAD II CCD
- ⇒ High Resolution of 600 TVL
- ⇒ 4-9MM Auto iris lens
- ⇒ 3 Units of Dot Matrix Array LED
- ⇒ Array Range of 50 meters
- ⇒ With OSD, D- WDR

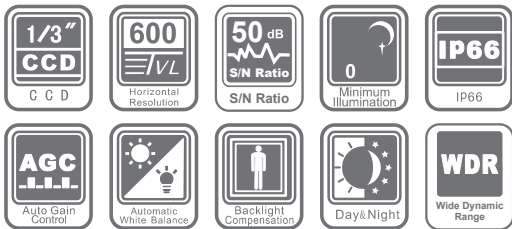

Feature	Specification
Image Sensor	1 / 3" SONY SUPER HAD II CCD
Pixels	PAL: 752 (H) ×582 (V) ; NTSC: 768 (H) ×494 (V)
Resolution	600TVL
Min. Illumination	COLOR :0.3Lux(F1.2,50IRE,AGC ON) ; B/W :0.005Lux(F1.2,50IRE,AGC ON)
S/N Ratio	More than 50dB (AGC OFF)
Electronic Shutter	PAL:1/50~1/100000s; NTSC:1/60~1/100000s
Iris Control	Auto
Lens	4-9MM auto iris lens
White Balance (AWB)	ATW1/ATW2/AWC / MANUAL
Gain Control (AGC)	Low/Milddle/High choice
Back Light Compensation	on/off
Day & Night (ICR)	Auto/Color/B/W/External Control
IR	3 units of Dot matrix Array LED
WDR	Digital WDR
Protocol	Pelco-D / Pelco-P/NEXTCHIP protocol
Sync	Power Synchronization / Internal Synchronization
Video Output	BNC Mode: twisted-pair method (built-in twisted pair transmission module)
Special Functions	OSD, Privacy Masking, Motion Detection
Power Supply	DC12V
Power Consumption	2.5W
IP Rating	IP66
Dimensions	260 x 185 x 100mm
Operating Temperature	'-20°C - +50°C
Weight	1500g
Certifications	CE, FCC & ROHS