


High Resolution Pin Hole Camera with OSD



Main Features

- ⇒ 1/3" SONY EXview HAD CCD II
- ⇒ 700 TVL High Resolution Camera
- ⇒ 0.05 lux @ F1.2
- ⇒ 3.6 mm Pin Hole Lens
- ⇒ 2D-DNR, OSD, AWB, AGC, BLC, HLC, ATR, MD, Privacy Masking, Picture Adjustment
- ⇒ CE, FCC and RoHS Certified

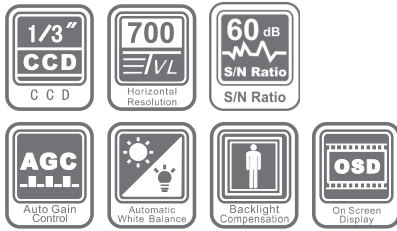

Feature	Specification
Image Sensor	1/3" Sony CCD
Pixels	PAL:752Hx582V, NTSC:768Hx494V
Resolution	600 TVL
Min. Illumination	0.05 lux @F1.2
S/N Ratio	more than 60dB
Electronic Shutter	1/50(1/60) - 1/100000 Sec
Lens	3.6 mm
Gamma Correction	0.45
White Balance (AWB)	Auto
Gain Control (AGC)	Auto
Back Light Compensation	ON/OFF Selectable
Sync	Internal
Video Output	1Vp-p Composite Output (75Ω/BNC)
Special Functions	2D-DNR, OSD, AWB, AGC, BLC, HLC, ATR, MD, Privacy Masking, Picture Adjustment
Power Supply	DC12V±10%
Power Consumption	Max 1.5W
Dimensions	30mm x 30mm x 15.9mm
Weight	50g
Operating Temperature	-30°C~+60°C
Certifications	CE, FCC, RoHs