


## 23x Cost-effective Weatherproof PTZ Dome Camera



### Main Features

- ⇒ 1/4" CMOS
- ⇒ High resolution of 540TVL
- ⇒ Min. Illumination of 0.5 Lux@F1.6
- ⇒ Powerful 23x optical zoom
- ⇒ Day/Night (ICR), 2D-DNR, Auto iris, Auto focus, AWB, AGC, BLC
- ⇒ Max 300 °/s pan speed, 360° continuous pan rotation and auto flip with no blind spot monitor
- ⇒ Upto 255 Presets, 5 Auto Pattern, 8 Auto Tour, 5 auto scan
- ⇒ Auto recognition of general protocols Pelco-P/D
- ⇒ Auto restore to previous PTZ and lens status after power failure
- ⇒ IP66 all-environments protection, 4000V thunder-proof, auto constant temperature & anti-fog

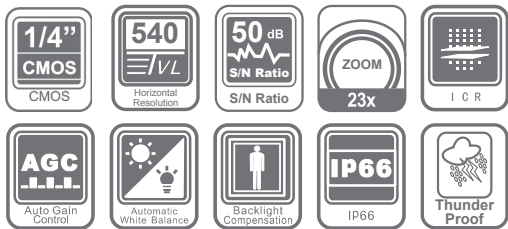

Feature	Specification
Image Sensor	1/4" CMOS
Pixels	640H) × 480(V)
Resolution	540 TVL
Min. Illumination	0.5 Lux@F1.6
S/N Ratio	More than 50 dB
Electronic Shutter	1/50s~1/10,000s
Zoom Optical	23x
Lens	3.9 ~ 89.7 mm
White Balance (AWB)	Auto / Manual
Gain Control (AGC)	Auto / Manual
Back Light Comp.	ON/OFF
Day & Night (ICR)	Yes
Special Functions	4000V thunder and wave protection
Pan Range	Horizontal: 0°~360°endless, Vertical: -2°~90° auto flip 180° to continue monitor
Tilt Range	Horizontal: 0°~360°endless, Vertical: -2°~90° auto flip 180° to continue monitor
Number of Presets	255
Preset Speed	Horizontal: 300°/s, Vertical: 180°/s
Surge Protection	Yes
Alarm	Input: 2, Output: 1
Video Output	CVBS: 1.0Vp-p / 75Ω
Power Supply	AC 24V/1.5A(±10%)
Power Consumption	15W(Indoor), 27W(Outdoor, heater on)
IP Rating	IP66
Dimensions	Φ222(mm) x 322(mm)
Weight	5.0kg
Operating Temp	-40°C ~ 60°C
Certifications	CE, FCC and RoHS