

DH-IPC-HDBW3110

1.3Megapixel HD Vandal-proof Network IR Dome Camera



Features

- 1/3" 1.3Megapixel progressive scan SONY CCD
- H.264 & MJPEG dual-stream encoding
- Max 12/15fps@1.3M(1280×960)&25/30fps@720P(1280×720)
- DWDR, Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.8~12mm varifocal lens
- Built-in 2/1 alarm in/out
- Max. IR LEDs length 20m
- Micro SD memory, IP66, IK10, PoE

DH-IPC-HDBW3110


Specifications

| Model | DH-IPC-HDBW3110P | | DH-IPC-HDBW3110N | |
|--------------------------|--|-------------------------------|--|-------------------------------|
| Camera | | | | |
| Image Sensor | 1/3" 1.3Megapixel PS CCD | | | |
| Effective Pixels | 1280(H)x960(V) | | | |
| Scanning System | Progressive | | | |
| Electronic Shutter Speed | Auto/Manual 1/50~1/10000 | | Auto/Manual 1/60~1/10000 | |
| Min. Illumination | 0.2lux/F1.4(color),0.01Lux/F1.4(B/W),0Lux(IR on) | | | |
| S/N Ratio | > 50dB | | | |
| Video Output | 1 channel BNC(1.0Vp-p, 75Ω) | | | |
| Camera Features | | | | |
| Max. IR Length | 20m | | | |
| Day/Night | Auto(ICR) / Color / B/W | | | |
| Backlight Compensation | BLC | | | |
| White Balance | Auto | | | |
| Gain Control | Auto/Manual | | | |
| Noise Reduction | 2D | | | |
| Privacy Masking | Up to 4 areas | | | |
| Lens | | | | |
| Focal Length | 2.8~12mm | | | |
| Max Aperture | F1.4 | | | |
| Focus Control | Manual | | | |
| Angle of View | H: 92°(Wide)~27.2°(Tele) | | | |
| Lens Type | Manual / Auto Iris (DC) | | | |
| Mount Type | CS | | | |
| Video | | | | |
| Compression | H.264 / MJPEG | | | |
| Resolution | 1.3M(1280×960) / 720P(1280×720) / D1(704×576) / CIF(352×288) / | | 1.3M(1280×960) / 720P(1280×720) / D1(704×480) / CIF(352×240) / | |
| Frame Rate | Main Stream | 1.3M(1~12fps)/720P(1 ~ 25fps) | | 1.3M(1~15fps)/720P(1 ~ 30fps) |
| | Sub Stream | D1/CIF(1 ~ 25/30fps) | | |
| Bit Rate | H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 10240Kbps | | | |
| Audio | | | | |
| Compression | G.711a / G.711u (64kbps)/ PCM(128kbps) | | | |
| Interface | 1/1 channel In/Out | | | |
| Network | | | | |
| Ethernet | RJ-45 (10/100Base-T) | | | |
| Protocol | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour | | | |
| ONVIF | ONVIF Ver. 2.0 | | | |

DH-IPC-HDBW3110

| | |
|----------------------------|--------------------------------------|
| Max. User Access | 10 users |
| Smart Phone | iPhone, iPad, Android, Windows Phone |
| Auxiliary Interface | |
| Memory Slot | Micro SD, Max 32GB |
| Alarm | 2/1 channel In/Out |
| General | |
| Power Supply | DC12V/AC24V, PoE(802.3af) |
| Power Consumption | <10W |
| Working Environment | -10°C~+60°C, 10%~90% |
| Protection Level | IK10 & IP66 |
| Dimensions | Φ160mm × 118.5mm |
| Weight | 1.25kg |

Dimensions (mm)

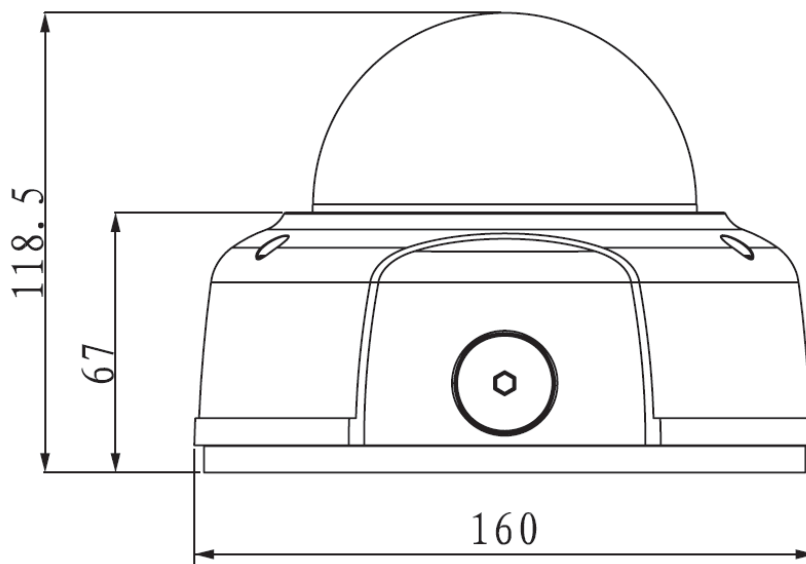

<http://www.asi.ind.in>

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.