

## DH-IPC-DBW665

### D1 Vandal-proof Network IR Dome Camera



#### Features

- 1/3" SONY Super HAD CCD
- H.264 dual-stream encoding
- 25/30fps@D1/HD1/CIF/QVGA resolution
- D&N, 2DNR, AWB, AGC, BLC,
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 6mm fixed lens (3.6mm,8mm,12mm optional)
- Built-in 2/1 alarm in/out
- Max IR LEDs length 30m
- Mirco SD memory, IP65, IK10, PoE

# DH-IPC-DBW665


## Technical Specifications

Model	DH-IPC-DBW665P		DH-IPC-DBW665N	
<b>Camera</b>				
Image Sensor	1/3" SONY Super HAD CCD			
Effective Pixels	795(H)x596(V)		811(H)x508(V)	
Scanning System	Progressive			
Electronic Shutter Speed	Auto/Manual 1/25~1/10000		Auto/Manual 1/30~1/10000	
Min. Illumination	0.1LUX/F1.2,0Lux/F1.2(IR on)			
S/N Ratio	> 50dB			
Video Output	1 channel BNC(1.0Vp-p, 75Ω)			
<b>Camera Features</b>				
Max. IR LEDs Length	30m			
Day/Night	Auto(Electronic) / Color / B/W			
Backlight Compensation	BLC			
White Balance	Auto			
Gain Control	Auto			
Noise Reduction	2D			
Privacy Masking	Up to 4 areas			
<b>Lens</b>				
Focal Length	6mm (3.6mm,8mm,12mm)			
Max Aperture	F1.8			
Focus Control	Fixed lens			
Angle of View	H: 42° (70°/46°/35°)			
Mount Type	Board-in Type			
<b>Video</b>				
Compression	H.264			
Resolution	D1(704×576) /HD1(704x288)/ CIF(352×288)/QVGA(320×240) /QCIF(176x144)/QQVGA(160x120)		D1(704×480) /HD1(704x288) CIF(352×240) / QVGA(320×240) /QCIF(176x120)/QQVGA(160x120)	
Frame Rate	Main Stream	D1/HD1/CIF(1 ~ 25/30fps)		
	Sub Stream	D1/HD1/CIF/QVGA/QCIF/QQVGA(1 ~ 25/30fps)		
Bit Rate	H.264: 32K ~ 4096Kbps			
<b>Audio</b>				
Compression	G.711a/G.711u(64kbps)/PCM(128kbps)/AMR(64kbps)			
Interface	1 /1 channel In/Out			
<b>Network</b>				
Ethernet	RJ-45 (10/100Base-T)			
Protocol	IPv4, HTTP, SSL, TCP/IP, UDP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter,			
ONVIF	ONVIF Ver. 2.0			
Max. User Access	10 users			

## DH-IPC-DBW665

Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 32GB
Alarm	2/1 channel In/Out
<b>General</b>	
Power Supply	DC12V, PoE(802.3af)
Power Consumption	<5W
Working Environment	-10°C~+55°C, 10%~90%
Protection Level	IP65, IK10
Dimensions	Φ141mm×120mm
Weight	350kg

### Dimensions (mm)

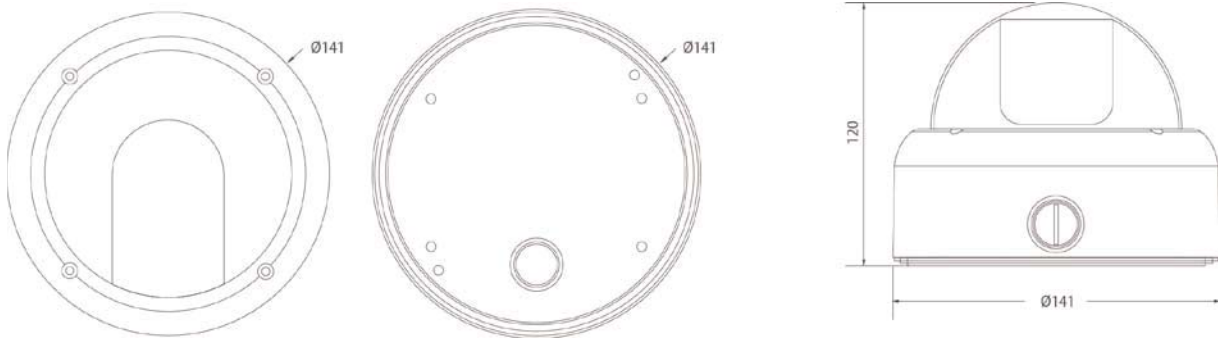

<http://www.asi.ind.in>

### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.