


DS-2CC5132P(N) DIS Dome Camera

Discontinued

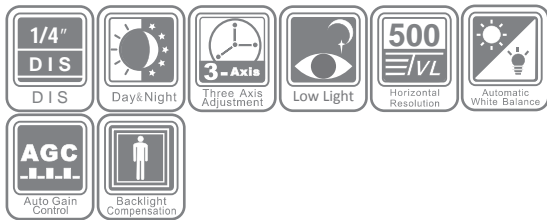

Key Features

- 1/4" DIS
- 500 TVL resolution
- Low illumination
- Day / night auto switch
- 3-axis adjustment
- Compact design

Specifications

DS-2CC5132P(N)	
Camera	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640 (H) × 480 (V)
Min. illumination	0.1 lux@F1.2, AGC on 0.28 lux@F2.0, AGC on
Shutter time	PAL: 1/25s ~ 1/15,000s NTSC: 1/30s ~ 1/15,000s
Lens	3.6 mm @ F2.0 (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) Angle of view: 58° (3.6 mm)
Lens mount	M12
Angle adjustment	Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°
Day & night	Electronic
Horizontal Resolution	500 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC)
S/N ratio	More than 52dB
General	
Operating conditions	-40°C ~ 70°C (-40°F ~ 158°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	1W max.
Dimensions	Φ 97.8 x 64.4 mm (Φ 3.85" x 2.54")
Weight	300g (0.66 lbs)

Available models

DS-2CC5132P, DS-2CC5132N

Dimensions

