




DS-2CC502/512/592P(N)-FB Vandal Proof Color Camera

- Compact design
- 1/3" Sony CCD
- Day/night auto switch
- Low Illumination: 0.1Lux@F1.2
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization

Unit: mm

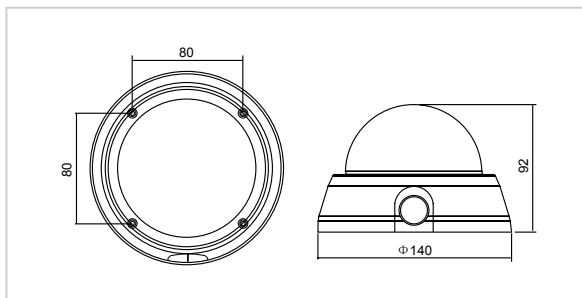

Specifications

		DS-2CC502P(N)-FB	DS-2CC512P(N)-FB	DS-2CC592P(N)-FB
Camera	Image Sensor	1/3" SONY Super HAD CCD		
	Effective Pixels	PAL: 500(H)×582(V) NTSC: 510(H)×492(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL/NTSC		
	Min. Illumination	0.1Lux @ F1.2		
	Electronic Shutter	1/50 (1/60)s~1/100,000s		
	Day&Night	Electronic		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω/BNC)		
	S/N Ratio	More than 48 dB		
Lens	BLC	ON		
	Impact Protection	IEC60068-2-75 test, Eh, 50J; EN50102, exceeding IK10.		
	Lens	3.5~8mm (4~9mm optional)		
General	Power Supply	12 VDC, ±10%		
	Power Consumption	2W MAX		
	Working Temperature	-10°C~60°C(14°F~140°F)		
	Dimension	Φ140×92mm (Φ5.51"×3.62")		
	Weight	660g (1.45lbs)		

Available Models

DS-2CC502P-FB, DS-2CC502N-FB, DS-2CC512P-FB, DS-2CC512N-FB, DS-2CC592P-FB, DS-2CC592N-FB