




## DS-2CC102/112/192P(N)-IRA Color IR Camera

- Compact design
- 1/3" SONY CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- IR Range: Approx 100m to 110m
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Unit: mm

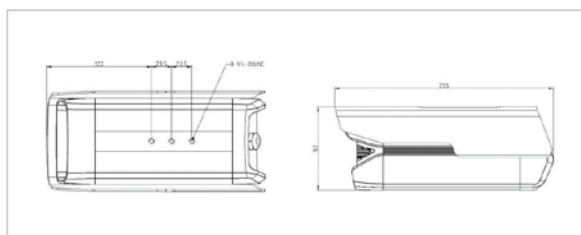

### Specifications

		DS-2CC102P(N)-IRA	DS-2CC112P(N)-IRA	DS-2CC192P(N)-IRA
Camera	Image Sensor	1/3 inch SONY Super HAD CCD		
	Effective Pixels	PAL: 500(H)×582(V) NTSC: 510(H)×492(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)	PAL: 752 (H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL/NTSC		
	Min. Illumination	0.1Lux @ F1.2 (0 LUX with IR)		
	Electronic Shutter	1/50 (1/60)s~1/100,000s		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω/BNC)		
	S/N Ratio	More than 48 dB		
	BLC	ON		
Lens	Lens	25 mm default (16 mm optional)		
	IR Range	Approx 100m to 110m(320-350ft)		
General	Weather Proof	IP66		
	Power Supply	24VAC±10% (12VDCV±10% Optional)		
	Power Consumption	15W		
	Working Temperature	-10°C ~ 60°C(14°F~140°F)		
	Dimension	255×177×95mm (10.04"×6.97"×3.74" )		
Weight	2500g (5.50lbs)			

### Available Models

DS-2CC102P-IRA, DS-2CC102N-IRA, DS-2CC112P-IRA, DS-2CC112N-IRA, DS-2CC192P-IRA, DS-2CC192N-IRA