


## DS-2CC1132P(N)-IR IR Weather-proof DIS Bullet Camera

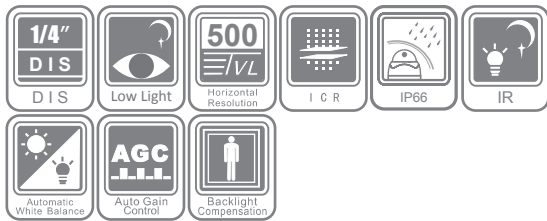

### Key Features

- 1/4" DIS
- 500TVL resolution
- 20m IR range
- Low illumination
- True day / night
- IP66 rating

### Specifications

DS-2CC1132P(N)-IR	
<b>Camera</b>	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640 (H) × 480 (V)
Min. illumination	0.1 lux @ (F1.2, AGC on), 0 lux with IR 0.2 lux @ (F1.8, AGC on), 0 lux with IR
Shutter time	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	2.8 mm @ F1.8 (3.6 mm, 6 mm optional) Angle of view: 66.2° (2.8 mm)
Lens mount	M12
Day & night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1 Vp-p composite output (75 Ω/BNC)
S/N ratio	More than 52dB
BLC	On
<b>General</b>	
Operating conditions	-40 °C ~ 70 °C (-40°F ~ 158 °F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	1W (Max. 2.5W with IR cut filter on)
Weather-proof rating	IP66
IR range	Approx 10 to 20 meters
Dimensions	Φ 65 × 104 mm (Φ 2.56" × 4.09")
Weight	250g (0.55 lbs)

### Available models

DS-2CC1132P-IR, DS-2CC1132N-IR

### Dimensions

