



## EagleEyes for Mobile Surveillance

Official Website : [www.eagleeyesccv.com](http://www.eagleeyesccv.com)  
Video Demo : [www.eagleeyesccv.com/video](http://www.eagleeyesccv.com/video)  
Facebook : [www.eagleeyesccv.com/facebook](http://www.eagleeyesccv.com/facebook)

# KPD677LA

## 8CH H.264 DVR

### USB Mouse Control with GUI Display



## ▶ FEATURES

### ▶ **USB Mouse Control with GUI OSD**

- The GUI OSD interface is provided and used with your USB mouse.

### ▶ **Intelligent Motion Trigger Recording**

- Only the channel with an event will be recorded to effectively save a significant amount of hard disk space and have the maximized recording time.
- Supports pre-alarm recording.

### ▶ **Remote Surveillance**

- Mobile surveillance via our self-developed and free program, "EagleEyes", is supported on many popular mobile platforms, such as iPad, iPhone, BlackBerry, Windows Mobile, Symbian & Android.
- Network surveillance via the licensed software "Video Viewer", Internet Explorer, Mozilla Firefox or Google Chrome web browser, and QuickTime player is supported with up to 10 users' login simultaneously.

### ▶ **Remote Independent Operation**

- Channel switching is independent from the local site, allowing users to have private image monitoring remotely.

### ▶ **H.264 Video Compression Technology**

- Highly improves video quality for live, recording, and network.
- Recording file size is minimized for longest recording time.
- Lower bit rate required for fastest network transfer.


### ▶ **Backup Function**

- Supports USB flash drive and network backup.

### ▶ **Audio / Video Support**

- 4 audio-in, 1 audio-out to record sounds.
- Video output for LCD & CRT monitors simultaneously.

## ▶ REAR PANEL

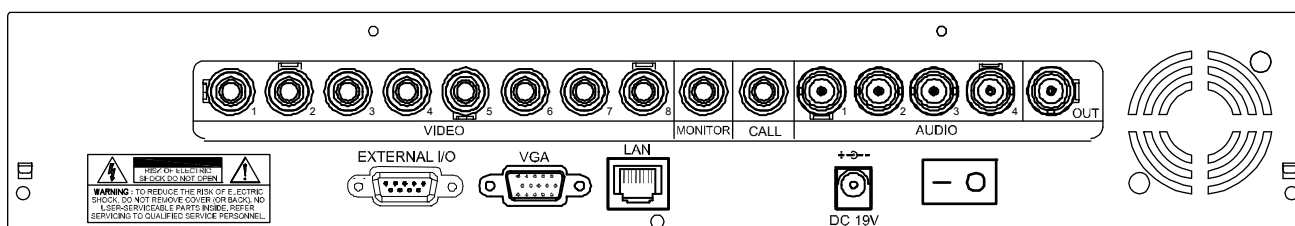



## EagleEyes for Mobile Surveillance

Official Website : [www.eagleeyesccctv.com](http://www.eagleeyesccctv.com)  
 Video Demo : [www.eagleeyesccctv.com/video](http://www.eagleeyesccctv.com/video)  
 Facebook : [www.eagleeyesccctv.com/facebook](http://www.eagleeyesccctv.com/facebook)

## ▶ SPECIFICATIONS

Video System		NTSC / PAL (auto detection)	
Video Compression Format		H.264	
Video Input (Composite video signal 1 Vp-p 75Ω BNC)		8 channels	
Video Output (BNC)	Main Monitor	For stable display	
	Call Monitor	For sequence display	
Video Output (VGA)		Built-in VGA interface for LCD monitor	
Audio Input / Output		4 audio inputs, 1 audio outputs (Mono)	
Maximum Recording Rate	Frame	704×480 pixels with 120 IPS <NTSC> / 704×576 pixels with 100 IPS <PAL>	
	CIF	352×240 pixels with 240 IPS <NTSC> / 352×288 pixels with 200 IPS <PAL>	
Image Quality Setting		BEST / HIGH / NORMAL	
Hard Disk Storage		Accommodates 1 SATA HDD (Capacity up to 2TB)	
Quick Search		Time / Motion / Alarm search mode	
Recording Mode		Manual / Timer / Motion / Alarm / Remote	
USB Mouse Control		YES	
Motion Detection Area		16 × 12 grids per channel	
Motion Detection Sensitivity		HIGH / NORMAL / LOW	
Pre-alarm Recording		YES	
Backup Device		USB 2.0 flash drive / Network	
Web Transmitting Compression Format		H.264	
Ethernet		10/100 Base-T. Supports remote control and live view via Ethernet	
Remote Surveillance (Operating System: Windows 7 / Vista / XP)	CMS:	Our self-developed and free software, "Video Viewer"	
	Web Browser:	Internet Explorer, Mozilla Firefox, Google Chrome, Safari & Opera	
	Media Player:	QuickTime	
	Max. on-line user:	10	
Network Protocol		TCP/IP, PPPOE, DHCP and DDNS	
Remote Independent Operation		YES	
Remote Event Download & Playback		YES	
Remote Live Audio		YES	
Event Notification		FTP & E-Mail	
IR Remote Control		YES (IR receiver built-in)	
Mobile Surveillance		YES	
Picture Zoom		2X digital zoom	
PTZ Control		YES	
Alarm I/O		4 inputs, 1 output	
Key Lock (Password Protection)		YES	
User Level		Administrator & Operator	
Video Loss Detection		YES	
Camera Title		Supports up to 12 letters	
Image and Volume Editing		Hue / Color / Contrast / Bright / Volume	
Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving		YES	
Power Source (±10%)		DC 19V	
Power Consumption (±10%)		< 42W	
Operating Temperature		10°C ~ 40°C (50°F ~ 104°F)	
Dimensions (mm)**		343(W) x 59(H) x 223(D)	
System Recovery		System auto recovery after power failure	
Optional Peripherals		Keyboard Controller	

\*The specifications are subject to change without notice.

\*\* Dimensional tolerance: ±5mm